




REV	DESCRIPTION	DATE
1.0	Release	20191021

SPECIFICATIONS


Current Rating:2.0 Amps
 Insulator resistance:1000MΩ Min.
 Dielectric withstanding:AC 500V
 Contact Resistance:20 mΩ Max
 Operating Temperature:-40° C - +105° C

MATERIALS


Contact Material:Copper Alloy
 Insulator Material:High Temperature Thermoplastic,UL 94V-0 Nylon
 Finish:Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

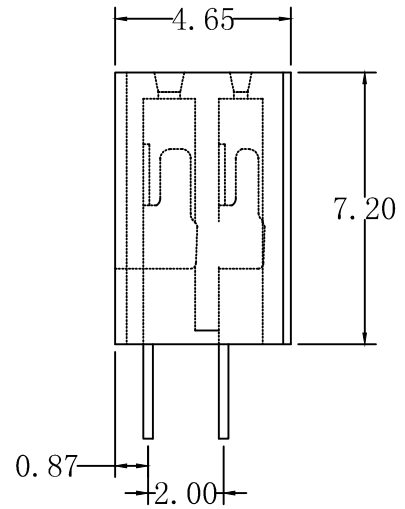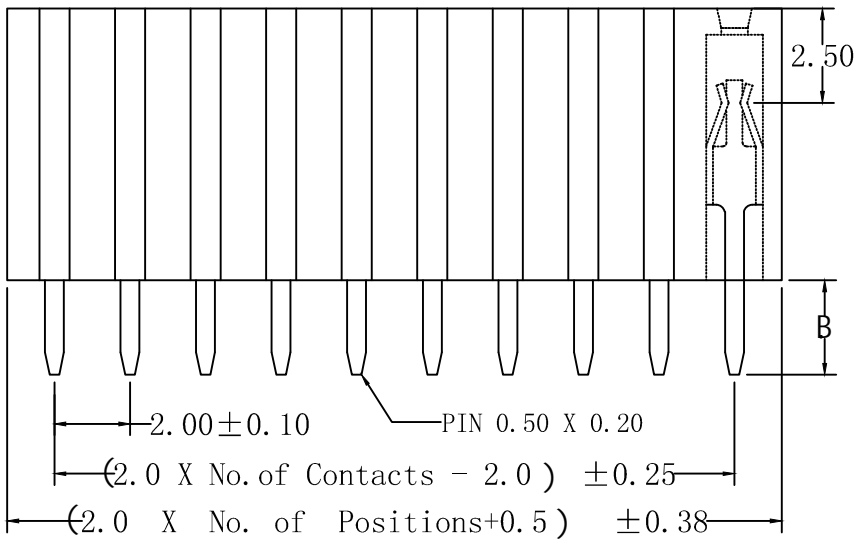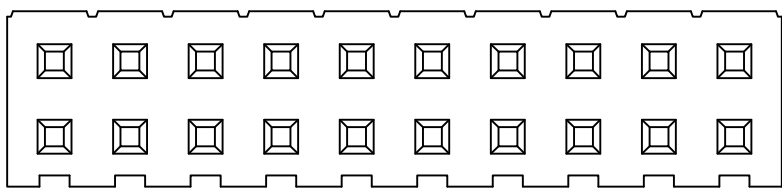

Recommended P. C. Board Hole Layout

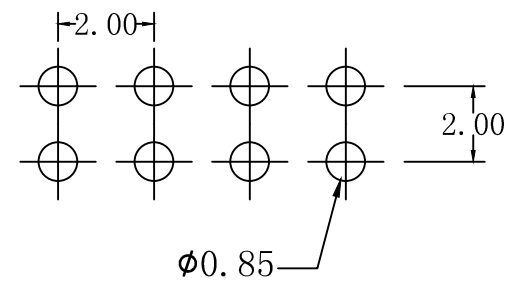

Ordering Information

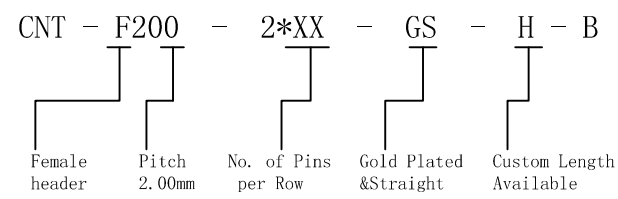

A		E	
B	2.5	F	
H	7.2	W	

<p>CNT 肯耐特电子有限公司</p>				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30	董道丽	20191021		
<p>REV. 1.0 UNIT mm SCALE 1:1</p>				.X° ±3°		CHECK	DATE	PART. NO.	2.00mm Female Header Dual Row Base 7.20H
				.XX° ±2°		.XX ±0.25	王芳芳	20191021	
				.XXX° ±1°		APPROVE	DATE		
				.XXX ±0.15		王元中	20191021		