
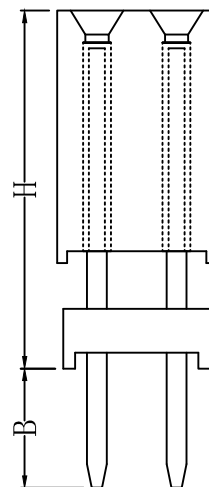
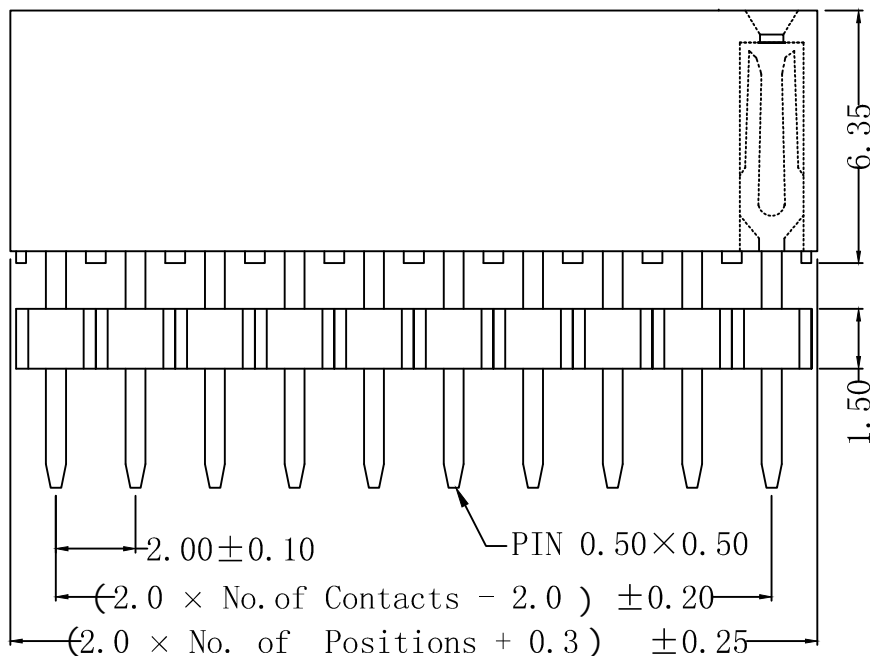


REV	DESCRIPTION	DATE

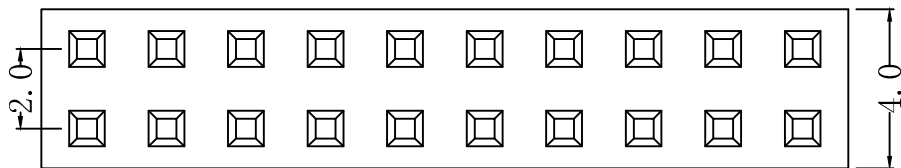


SPECIFICATIONS

Current Rating: 2.0 Amps
 Insulator resistance: $1000M\Omega$ Min.
 Dielectric withstanding: AC 500V
 Contact Resistance: $20 m\Omega$ Max
 Operating Temperature: $-40^\circ C - +105^\circ C$

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

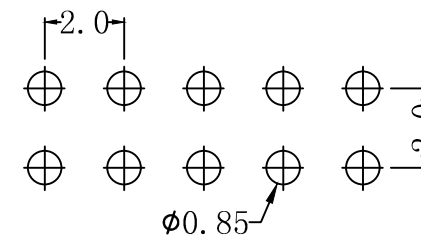

Ordering Information

CNT - F200 - 2*XX - GS - H/B
 Female header Pitch 2.00mm No. of Pins per Row Gold Plated & Straight Custom Length Available

A	E
B	F
H	W

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE								
1.0	mm	1:1	<table border="1"> <tr> <td>X.° ±5°</td> <td>X. ±0.30</td> </tr> <tr> <td>.X° ±3°</td> <td>.X ±0.38</td> </tr> <tr> <td>.XX° ±2°</td> <td>.XX ±0.25</td> </tr> <tr> <td>.XXX° ±1°</td> <td>.XXX ±0.15</td> </tr> </table>	X.° ±5°	X. ±0.30	.X° ±3°	.X ±0.38	.XX° ±2°	.XX ±0.25	.XXX° ±1°	.XXX ±0.15	董道丽	20190321		2.00mm Female Header Dual Row Straight Type
X.° ±5°	X. ±0.30														
.X° ±3°	.X ±0.38														
.XX° ±2°	.XX ±0.25														
.XXX° ±1°	.XXX ±0.15														
				王芳芳	20190321	PART. NO.									
				王元中	20190321	CNT-F200-2*XX-GS-H/B									