
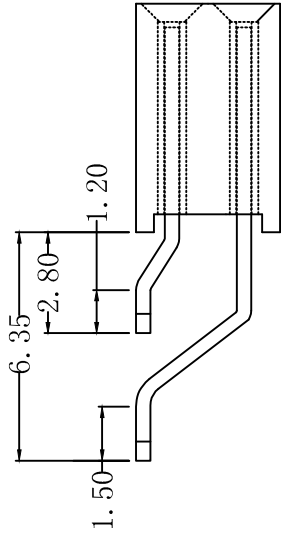
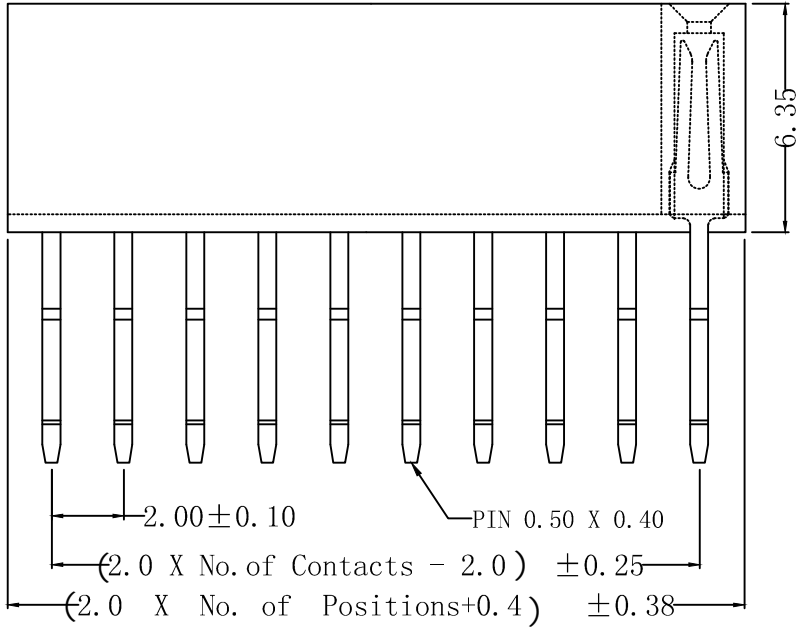


REV	DESCRIPTION	DATE

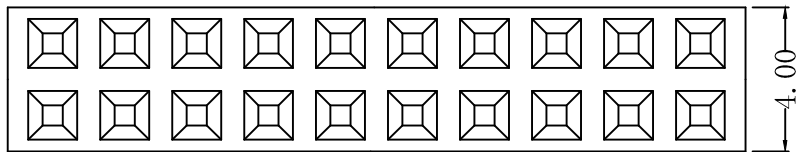


SPECIFICATIONS

Current Rating: 1.5 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 500V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Brass
 Standard: PA6T
 Insulator Material: Polyester UL 94V-0
 Finish: Gold/Tin Plated over Nickle
 Max. Processing Temp: 240°C for 30-60 seconds
 (260°C for 5 seconds)
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

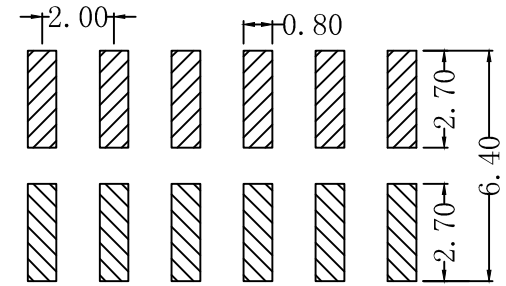

A		E	
B		F	
H	6.35	W	

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30	董道丽	20200108	20200108002	
REV. 1.0 UNIT mm SCALE 1:1				.X° ±3°		CHECK	DATE	PART. NO.	2.0FH 2xnPin H6.35卧贴
				.XX° ±2°	.XX ±0.25	王芳芳	20200108		
				.XXX° ±1°		APPROVE	DATE		
				.XXX ±0.15	王元中	20200108			