
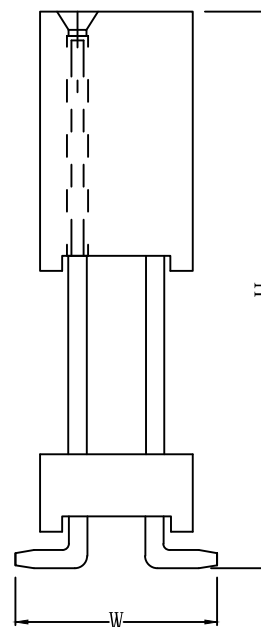
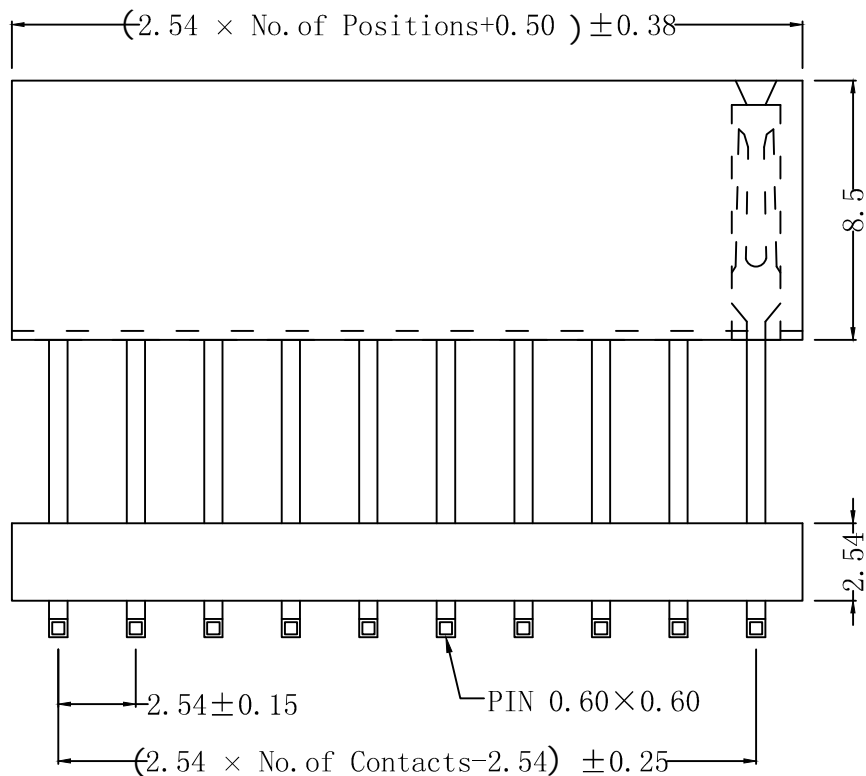


REV	DESCRIPTION	DATE

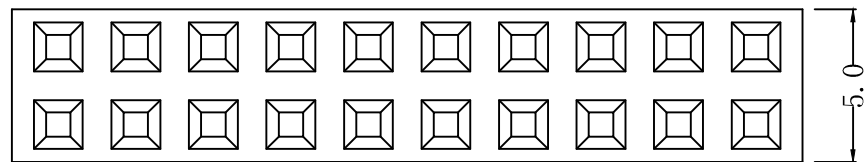


### SPECIFICATIONS

Current Rating: 3.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 600V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C


### MATERIALS

Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

### Recommended P.C. Board Hole Layout

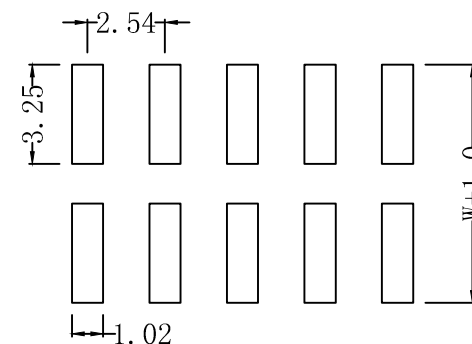

### Ordering Information

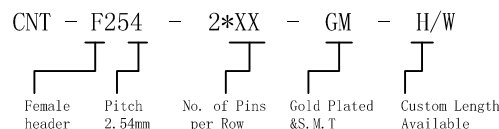

A	E
B	F
H	W

<b>CNT</b> 肯耐特电子有限公司			GENERAL TOLERANCE		DRAWN	董道丽	DATE	20190321	DWG. NO.	TITLE	
			X.° ±5°	X. ±0.30	CHECK	王芳芳	DATE	20190321	PART. NO.		
REV.	UNIT	SCALE		.X° ±3°	.X ±0.38	APPROVE	王元中	DATE	20190321	CNT-F254-2*XX-GM-H/W	2.54*2.54 Female Header Dual Row SMT
1.0	mm	1:1		.XX° ±2°	.XX ±0.25						
				.XXX° ±1°	.XXX ±0.15						