
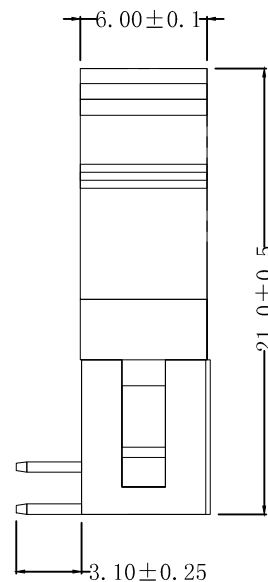
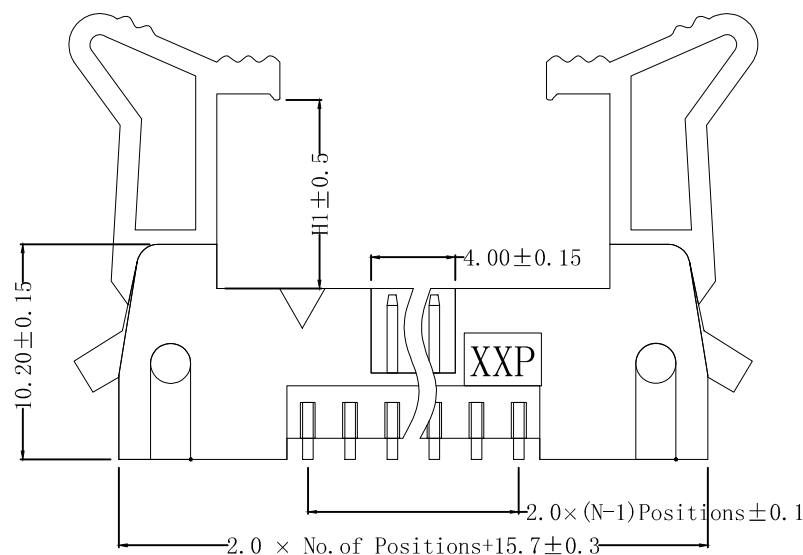


REV	DESCRIPTION	DATE

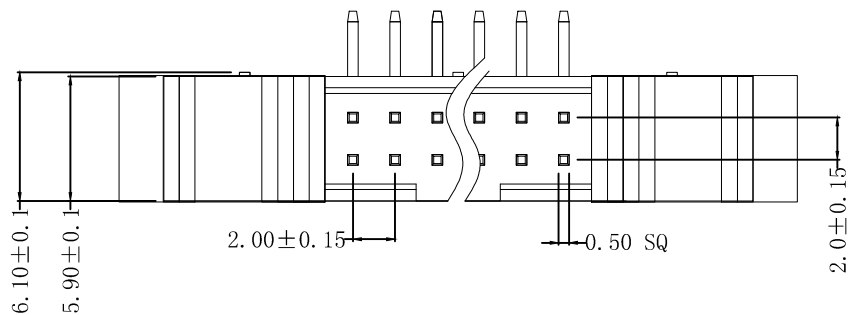

SPECIFICATIONS


Current Rating: 2.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 500V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS


Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Ordering Information

CNT - G200 - 2*XX - GD

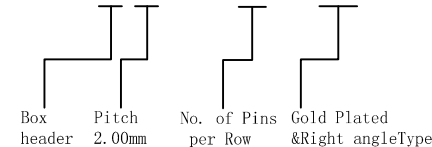

Recommended P. C. Board Hole Layout



A	E
B	F
H	W

CNT 肯耐特电子有限公司			GENERAL TOLERANCE		DRAWN 董道丽	DATE 20190321	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30				
REV. 1.0	UNIT mm	SCALE 1:1	.X° ±3°	.X ±0.38	APPROVE 王元中	DATE 20190321	PART. NO. CNT-G200-2*xx-GD	Pitch 2.0mm box header With Right Angle Dip Type
			.XX° ±2°	.XX ±0.25				
			.XXX° ±1°	.XXX ±0.15				