


Ordering Information

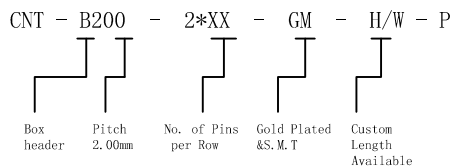

A	E
B	F
H	W

REV	DESCRIPTION	DATE


SPECIFICATIONS

Current Rating: 2.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 500V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

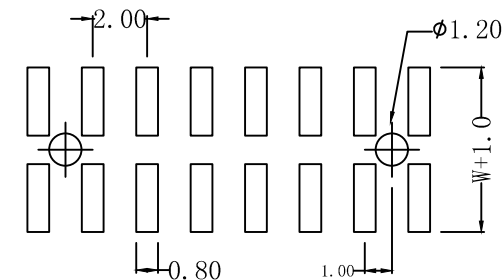

<p><b>CNT</b> 肯耐特电子有限公司</p>			GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5° X. ±0.30	董道丽	20190321		
.X° ±3° .X ±0.38	CHECK	DATE	PART. NO.				
.XX° ±2° .XX ±0.25	王芳芳	20190321					
.XXX° ±1° .XXX ±0.15	APPROVE	DATE	CNT-B200-2*xx-GM-H/W-P		2.0mm Shrouded Header SMT Type		
REV. 1.0	UNIT mm	SCALE 1:1		王元中	20190321		