
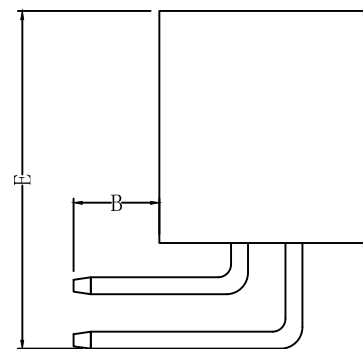
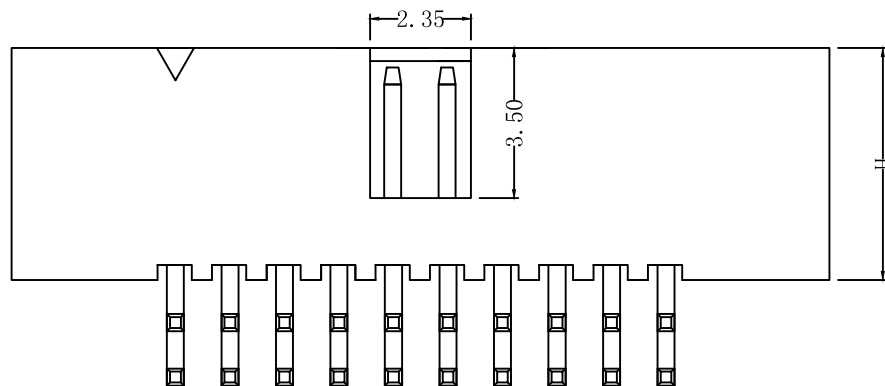


| REV | DESCRIPTION | DATE |
|-----|-------------|------|
| | | |
| | | |

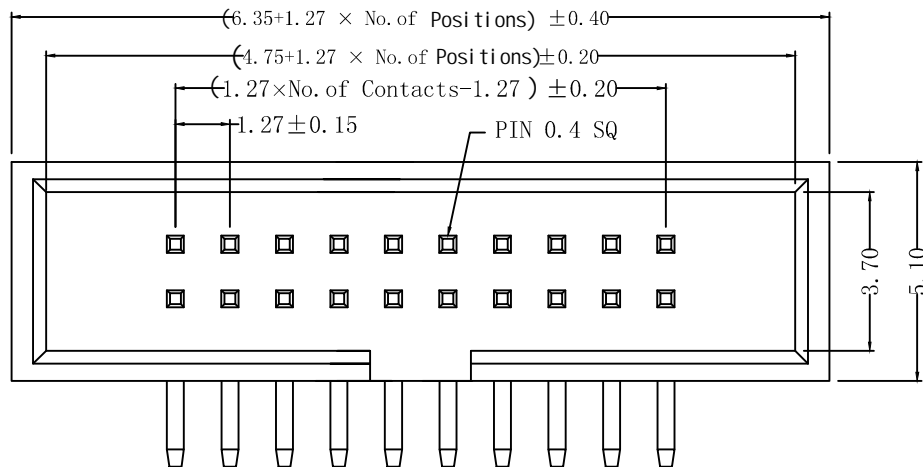


SPECIFICATIONS

Current Rating: 1.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 300 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout



Ordering Information

CNT - B127 - 2*XX - GD - H/B

Box header Pitch 1.27mm No. of Pins per Row Gold Plated & Right angle Type Custom Length Available

| | | | |
|---|-----|---|--|
| A | | E | |
| B | 2.3 | F | |
| H | 5.4 | W | |

CNT 肯耐特电子有限公司

| REV. | UNIT | SCALE | GENERAL TOLERANCE | DRAWN | DATE | DWG. NO. | TITLE |
|------|------|-------|---|-------|----------|----------------------|---------------------------|
| 1.0 | mm | 1:1 | X.° ±5° .X° ±3° .XX° ±2° .XXX° ±1° | 董道丽 | 20190819 | | 1.27mm Box Heade Straight |
| | | | X. ±0.30 .X ±0.38 .XX ±0.25 .XXX ±0.15 | 王芳芳 | 20190819 | PART. NO. | |
| | | | | 王元中 | 20190819 | CNT-B127-2*XX-GD-H/B | |