

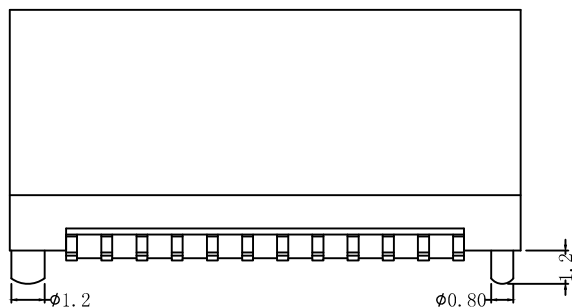

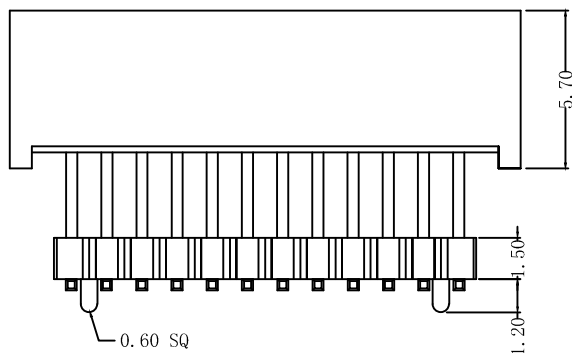


REV	DESCRIPTION	DATE

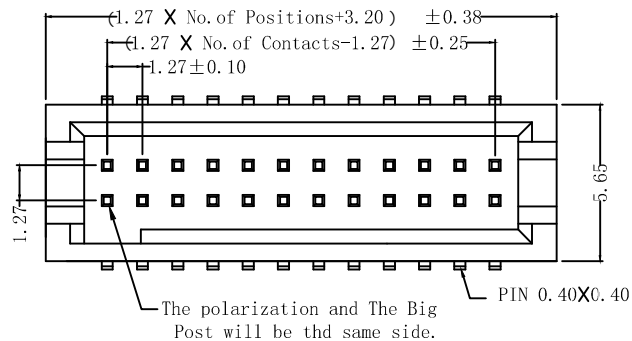


### SPECIFICATIONS

Current Rating: 1.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 300 V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C


### MATERIALS

Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

### Ordering Information

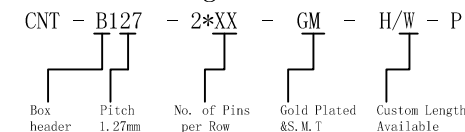

### Recommended P.C. Board Hole Layout

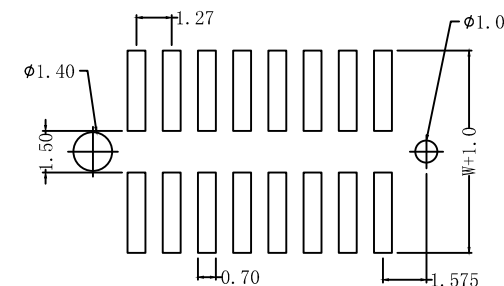

A	E
B	F
H	W

**CNT** 肯耐特电子有限公司

REV.	UNIT	SCALE	
1.0	mm	1:1	

GENERAL	TOLERANCE
X.°	$\pm 5^\circ$
.X°	$\pm 3^\circ$
.XX°	$\pm 2^\circ$
.XXX°	$\pm 1^\circ$
X.	$\pm 0.30$
.X	$\pm 0.38$
.XX	$\pm 0.25$
.XXX	$\pm 0.15$

DRAWN	董道丽	DATE	20190321
CHECK	王芳芳	DATE	20190321
APPROVE	王元中	DATE	20190321

DWG. NO.	CNT-B127-2*XX-GM-H/W-P
PART. NO.	

TITLE
1.27*1.27 Box Header Of Various Height Series SMT Type