

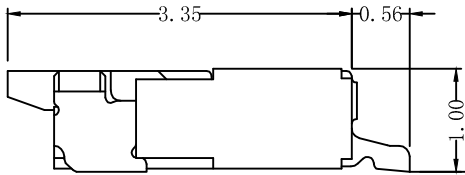
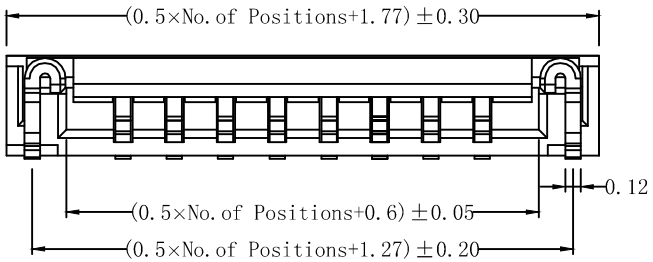


REV	DESCRIPTION	DATE

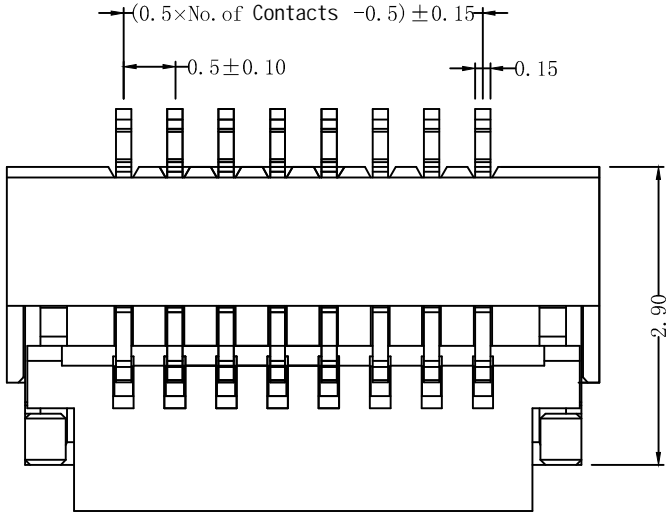

NOTE:

- MATERIAL  
 HOUSING:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.  
 ACTUATOR:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.  
 CONTACT:PHOSPHOR BRONZE.  
 PLATING: GOLD PLATED OVER NICKEL.  
 HOLDDOWN:BRASS.PLATING: TIN PLATED OVER NICKEL.
- ELECTRICAL  
 CURRENT:0.5A MAX.  
 DIELECTRIC WITHSTANDING VOLTAGE:250V AC MIN.  
 CONTACT RESISTANCE:20mΩ MAX.  
 INSULATION RESISTANCE:50MΩ MIN.
- ENVIRONMENTAL  
 TEMPERATURE:-25°C TO +85°C
- PART NO.  
 CNT-FPC050-XX-TDM-S20-100

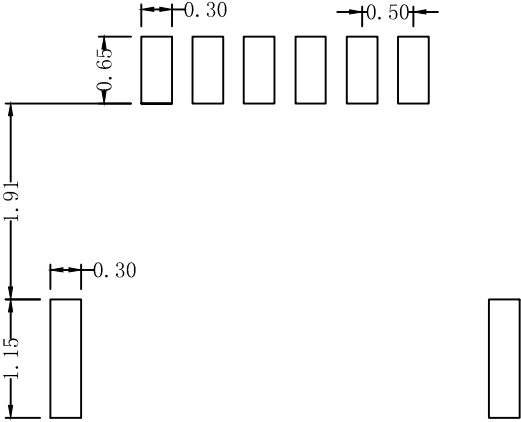

RECOMMEND PCB LAYOUT  
 TOLERANCE:±0.05

<p><b>CNT</b> 肯耐特电子有限公司</p>				GENERAL TOLERANCE	DRAWN 董道丽	DATE 20191011	DWG. NO.	TITLE
				X.° ±5° X. ±0.30	CHECK 王芳芳	DATE 20191011	PART. NO.	FPC 0.5mm 单面下接 掀盖式 平脚位 SMT90度 (H=1.0mm)
REV. 1.0	UNIT mm	SCALE 1:1	⊕	.X° ±3° .X ±0.38	APPROVE 王元中	DATE 20191011	CNT-FPC050-XX-TDM-S20-100	
				.XX° ±2° .XX ±0.25				
				.XXX° ±1° .XXX ±0.15				