
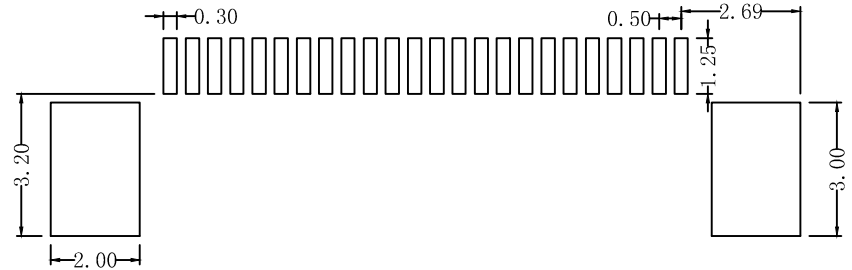
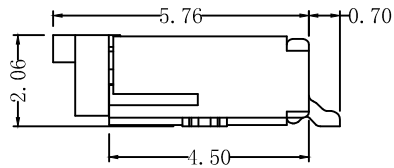
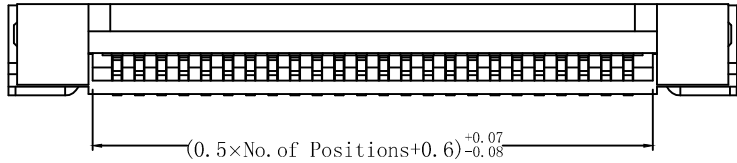


| REV | DESCRIPTION | DATE |
|-----|-------------|------|
| | | |
| | | |

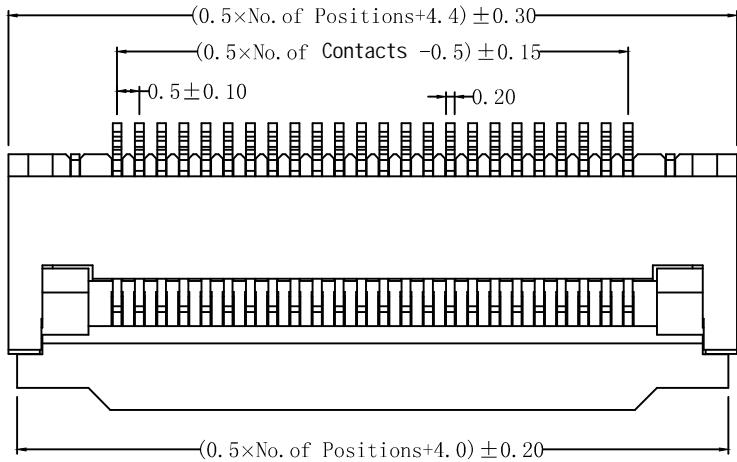

NOTE:

- MATERIAL
 - HOUSING:LCP,HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
 - ACTUATOR:LCP,HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
 - CONTACT:COPPER ALLOY.
 - PLATING:TIN OR GOLD PLATED OVER NICKEL.
 - HOLDDOWN:COPPER ALLOY. PLATING:TIN OR GOLD PLATED OVER NICKEL.
- ELECTRICAL
 - CURRENT:0.5A MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE:250V AC MIN.
 - CONTACT RESISTANCE:20mΩ MAX.
 - INSULATION RESISTANCE:50MΩ MIN.
- ENVIRONMENTAL
 - TEMPERATURE:-20°C TO +85°C
- PART NO.
 - CNT-FPC050-XX-TDM-S20-200

RECOMMENDED PCB PATTERN

| | | | | | | | | | |
|-----------------------------|---------|-----------|--|-------------------|------------|-------------|---------------|---------------------------|--|
| <p>CNT 肯耐特电子有限公司</p> | | | | GENERAL TOLERANCE | | DRAWN 董道丽 | DATE 20191011 | DWG. NO. | TITLE |
| | | | | X.° ±5° | X. ±0.30 | CHECK 王芳芳 | DATE 20191011 | PART. NO. | |
| REV. 1.0 | UNIT mm | SCALE 1:1 | | .X° ±3° | .X ±0.38 | APPROVE 王元中 | DATE 20191011 | CNT-FPC050-XX-TDM-S20-200 | FPC 0.5mm Pitch 单面下接触 掀盖式 平脚位 SMT90度 (H=2.0mm) |
| | | | | .XX° ±2° | .XX ±0.25 | | | | |
| | | | | .XXX° ±1° | .XXX ±0.15 | | | | |