

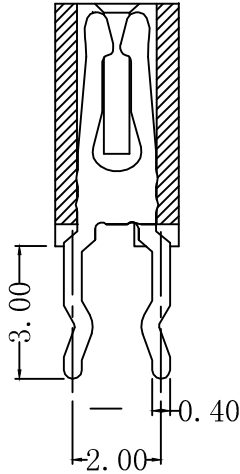
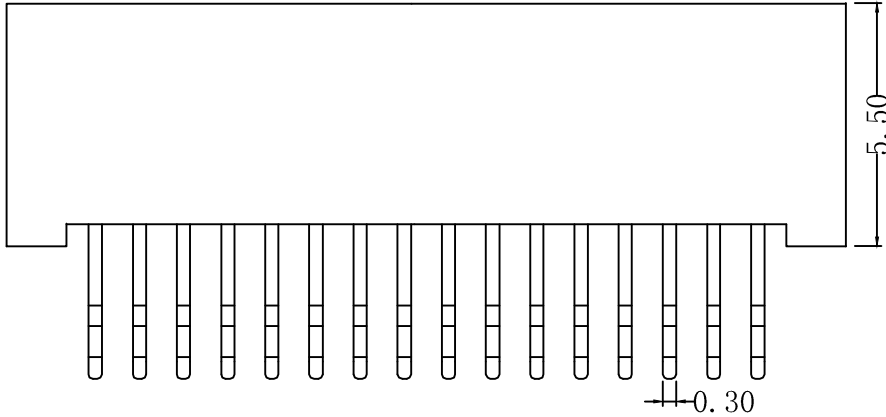


REV	DESCRIPTION	DATE

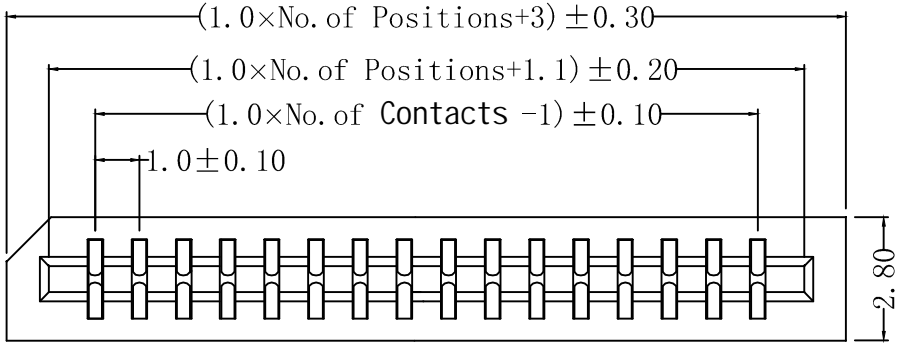

- NOTE:**
- **MATERIAL**  
 HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.  
 CONTACT: COPPER ALLOY.  
 PLATING: TIN PLATED OVER NICKEL.
  - **ELECTRICAL**  
 CURRENT RATING: 1.0 AMP.  
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.  
 INSULATION RESISTANCE: 500MΩ MIN.  
 CONTACT RESISTANCE: 30mΩ MAX.
  - **ENVIRONMENTAL**  
 TEMPERATURE RANGE: -25°C TO 85°C.
  - **PART NO.**  
 CNT-FPC100-XX-TS-D2-550

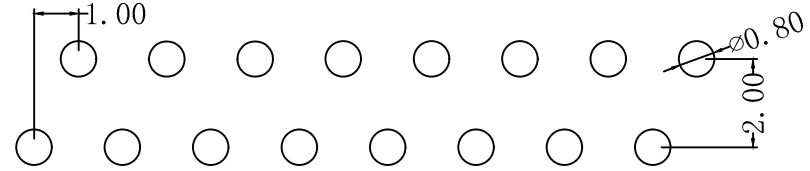

RECOMMENDED PCB LAYOUT

<b>CNT</b> 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN 董道丽	DATE 20191011	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30				
REV. 1.0	UNIT mm	SCALE 1:1		.X° ±3°	.X ±0.38	APPROVE 王元中	DATE 20191011	PART. NO. CNT-FPC100-XX-TS-D2-550	FPC/FFC 1.0 PITCH CONNECTOR TOP ENTRY DUAL CONTACT DIP TYPE
				.XX° ±2°	.XX ±0.25				
				.XXX° ±1°	.XXX ±0.15				