
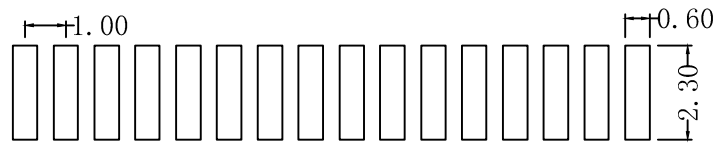

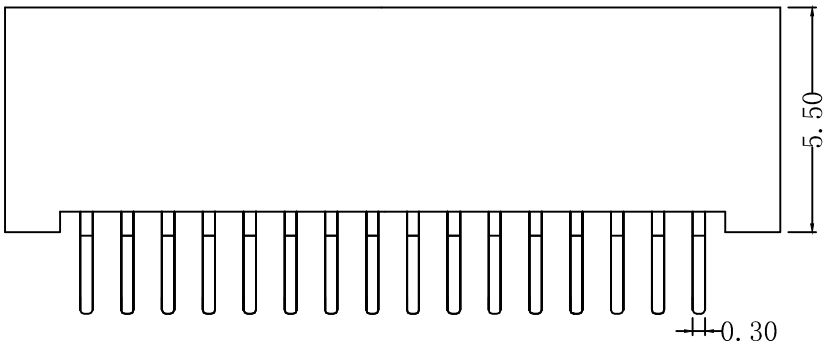


REV	DESCRIPTION	DATE

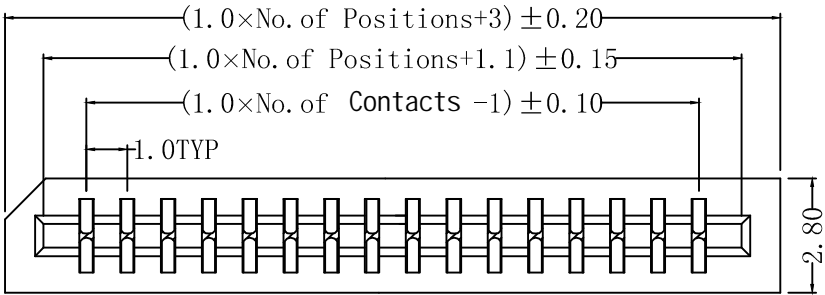

RECOMMENDED PCB LAYOUT

NOTE:

■ MATERIAL

HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.
 CONTACT: COPPER ALLOY.
 PLATING: TIN PLATED OVER NICKEL.

■ ELECTRICAL

CURRENT RATING: 1.0 AMP.
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.
 INSULATION RESISTANCE: 500MΩ MIN.
 CONTACT RESISTANCE: 30mΩ MAX.

■ ENVIRONMENTAL

TEMPERATURE RANGE: -25°C TO +85°C.

■ PART NO.

CNT-FPC100-XX-TDM-D3-550

<p>CNT 肯耐特电子有限公司</p>			GENERAL TOLERANCE		DRAWN 董道丽	DATE 20191011	DWG. NO.	TITLE	
			X.° ±5°	X. ±0.30	CHECK 王芳芳	DATE 20191011	PART. NO.		
REV. 1.0	UNIT mm	SCALE 1:1	⊕	.X° ±3°	.X ±0.38	APPROVE 王元中	DATE 20191011	CNT-FPC100-XX-TDM-D3-550	FPC 1.0 PITCH CONNECTOR SIDEENTRY DOUBLE CONTACT SMT TYPE
				.XX° ±2°	.XX ±0.25				
				.XXX° ±1°	.XXX ±0.15				