
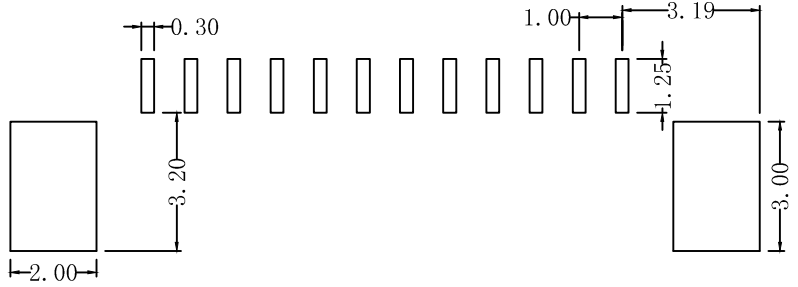
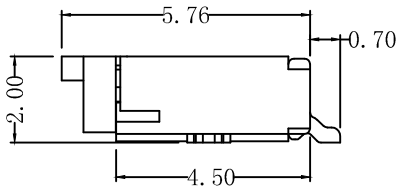
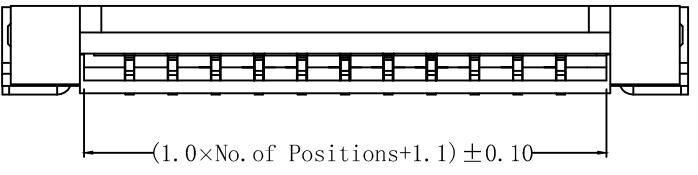


REV	DESCRIPTION	DATE

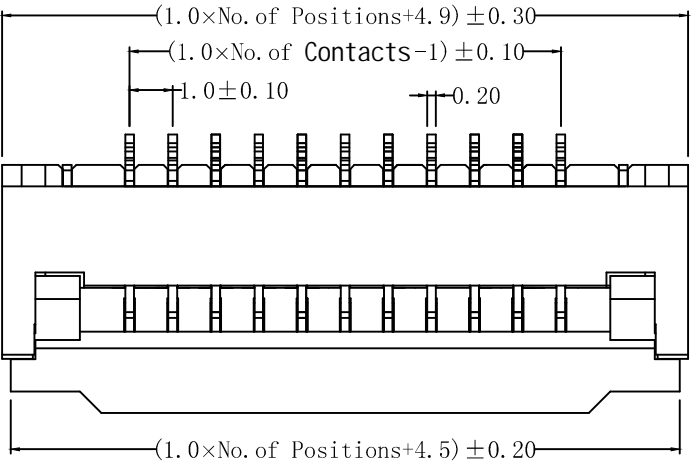

FPC/FFC Insert Direction
Recommended P.C.B Layout

NOTE:

- MATERIAL
 - HOUSING: LCP, HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
 - ACTUATOR: HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
 - CONTACT: COPPER ALLOY.
 - PLATING: TIN OR GOLD PLATED OVER NICKEL.
 - HOLDDOWN: COPPER ALLOY. PLATING: TIN OR GOLD PLATED OVER NICKEL.
- ELECTRICAL
 - CURRENT: 0.5A MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 250V AC MIN.
 - CONTACT RESISTANCE: 20mΩ MAX.
 - INSULATION RESISTANCE: 50MΩ MIN.
- ENVIRONMENTAL
 - TEMPERATURE: -25°C TO +85°C
- DIMENSIONAL INFORMATION

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN 董道丽	DATE 20191011	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30				
REV. 1.0	UNIT mm	SCALE 1:1		.X° ±3°	.X ±0.38	APPROVE 王元中	DATE 20191011	CNT-FPC100-XX-TDM-S20-200	FPC 1.0 PITCH 单面下接触 掀盖式 平脚位 SMT90° H=2.0mm
				.XX° ±2°	.XX ±0.25				
			.XXX° ±1°	.XXX ±0.15					